



TENDER NOTICE
CONSTRUCTION/SETUP OF SHIBERGHAN BRANCH

The First MicroFinanceBank, Afghanistan invites quotations from reputed firms/contractors to procure materials and services for the CONSTRUCTION/SETUP OF SHIBERGHAN BRANCH located in SHIBERGHAN CITY. Eligibility conditions are as follows:

1. Only quotations through e-mail from reputed, financially sound vendors duly registered with the Islamic Republic of Afghanistan for the Bill of Materials in the format given in the table below will be entertained.
2. The quotes MUST be submitted via email only. The bank's email ID for receiving quotations is **info@fmfb.com.af**
3. All taxes should be incorporated into the final total pricing.
4. The bank has the right to accept/reject any quotation as per its Procurement Policy.
5. Vendors with experience in refurbishment/branding of banks branches/ multinational company offices are encouraged to submit their offers/quotations including their company profile showing their experience in the required activities.
6. The deadline for submission of bids is **02 January, 2018, 1300 hours**.

BILL OF MATERIALS AND REQUIRED SERVICES

S.No	Description	Total SQM	Quantity	Price AFA	Total
1	<p>Teller Counter</p> <ul style="list-style-type: none">• 4 Teller Counters made of Malaysian Lassani 16mm wood.• Desks for 4 tellers with Malaysian Lassani 16mm with length of 1.2m and width of 0.6m, 4 drawers, and 1 wooden door include 100% Polyester painting.• The counter length must cover the entire length of the Teller Area specified in the floor plan – leaving 1m door length.• Branding with FMFB cut-out logo at the bottom part of teller counter with 10 mm blue frosted glass or plastic. 7m wooden partition behind the tellers with Malaysian Lassani 16mm including one door and sticker pasted on Lassani wood.• Digital lock for Head Teller`s room door.• 4 laser cut holes for each teller counter glass. <p>Sample picture 1</p> <p>Reception Desk: 16mmMalaysian Lassani wood polished material: Height: 80 cm Length: 240 cm Width : 60 cm Front surface of the desk: 20 cm with cut-out FMFB logo.</p> <p>Sample picture 2</p>				
2	<p>Security Staff Changing Room Fabrication and painting of 1 changing room for Clean Guards (Paint either car or oil) Height: 2.8m Length: 3.5m Width: 2m.</p>				
3	<p>Strong Room</p> <ul style="list-style-type: none">• Height: 2.5m, Width: 4m, Length: 4m and floor (4x4) m with 6mm Russian steel and Paint.	53	Russian steel		
4	<p>Branch Entrance Door: Installation of one stand sliding bullet-proof Metal Door both sides 6mm Russian steel with handles and proper locks system + Car Paint (Height 2.6m, width 1.3m).</p>	5.5	Russian steel		
5	<p>Kitchen PVC partition and door (3mx1m). Table for washing dishes and drawers for keeping dishes including water mixer and pipe lines with installing sink for hand washing 50 Liter Boiler (Table covered by Marmar stone). Shelf for keeping materials 6mx0.60m on the top of kitchen with Turkish Lassani high glass 16mm.</p>				
	<p>IT Room 1 steel door (1x2.6) m both sides 4mm Russian steel with lock proper lock system, handle and paint. 2.8m3 brick partition including plaster and paint. Fire Resistance flooring, Smoke detector/Fire alarm, Temperature, Humidity devices, Camera, Fire Extinguisher and painting.</p>				



6	<p>Networking: Network points for Total 35 Users at New Branch –Network Cable cat6 (Infilink) for 35 Units length (1 m each) for Server room+ 35 units Face plate (Infilink), 35 units Back Plate (Infilink), 40 units IO (Infilink), 6 carton network cable Cat6 (infilink) for entire branch, 1 unit Patch Panel 48 Port Cat6 (Infilink), Ducts with different sizes as per requirement, 1 Rack 24-U, 1 box RJ 45 and complete installation and connect to 3 Phase meter with 10mm Turkish cable.</p> <p>Lighting/Wiring: Lighting of 1 floor with 2.5 mm Iranian cable, 12 watt 40/40cm LED panel light, 70 pieces with switches. Wiring of 6/4mm Turkish cable for 10 Air Conditioners and wiring of 10mm Turkish cable for two 48000 BTU Air Conditioners.</p>				
7	<p>Security Searching Booth 1 wooden booth (Lassani Board 16mm include painting (1.5x1) m height 2.85m) for female searching area.</p> <p>Security Searching Booth 1 wooden both (Lassani Board 16mm including painting (4x1.5)m for APPF and Crean security guard including 1 wooden cabinet in male searching area for clients item's with thickness of 0.3m and height of 1.2m.</p> <p>Lighting and wiring + socket for each booths.</p>	4.5			
8	<p>Columns Covering columns with Malaysian Lassani 16mm and Polyester Paint. H: 2.7m. W: 0.35m</p>	75	21		
9	<p>Emergency Exit Doors: 1 metallic door width 110cm and height 260 cm back side 6 mm and front side 4mm Russian steel with lock and Handle from inside of the branch.</p>	2.8	1		
10	<p>Female Loan Officers Room 10m glass with height of 2.85m partition including 1m door for the female loan officers.</p>	16			
11	<p>Regional/Branch and Deputy Branch Manager Room: Glass partition include 1m door for each room (Aluminum frame for doors and partitions). Wooden partition (1x5) m including painting work for regional and deputy branch manager rooms.</p>	51sqm glass and 10sqm wooden partitions	2		
12	<p>Backdrop for Reception Desk made of Malaysian Lassani wood polished material; Center of backdrop will be 10 mm glass with length and height of 1.8m.</p> <p>Plastic Bank cutout logo to be installed on the backdrop L: 300cm, H: 2.85cm W: 20cm.</p> <p>Sample picture 3</p>				
13	<p>Installation of Matte finish stickers for 40 Turkish Lassani 16mm tables with FMFB logo.</p>	120			
14	<p>Blast Film All glasses of branch windows and interior glasses to be Covered with shatter-proof blast film made of USA.</p>				
15	<p>12sqm PVC partition including 1 m door for Kitchen.</p>				
16	<p>10mm Glass Partition including 1m door (Aluminum frame for door and partition frames) for Risk, Technical, Compliance, Credit Admin.</p>	25			
17	<p>Painting of all interior parts of branch</p>				
18	<p>Hanging Signs H: 50 cm, W: 177 cm, sticker pasted on foam board, hanged with metal chain (Gold Color).</p>		6		
19	<p>Door signs H: 10 cm, W: 30 cm, printed on Aluminum sheet engraved.</p>		14		
20	<p>High Quality False Ceiling on the top of reception area with gypsum board, L: 3m W: 3.5m thickness 20cm.</p>	11			
21	<p>Safe Room inside with 25cm brick partition plaster and paint, 1 steel door (1.3xf 2.6)m with double 6mm Russian steel bullet proof, backside with handle and lock + painting with Car paint.</p>	17m ³			
22	<p>Carton (Blue) to all interior windows.</p>	80			




The First MicroFinanceBank
اولین بانک قرضه های کوچک

23	6mm Russian steel (0.5x1.5) m for 22 windows painting with car paint and installation.	17			
24	1 PVC door for meeting room (1x2.6m).	2.6			
25	One 3 phase meter with Fuse and installation for changing the governmental electricity and Generator electricity.				
26	OWV installation for all interior glass partition. Design will be given by BSM department.	115			
27	Branding of interior parts of branch with 16mm Lassani wood.	60			
28	PVC partition including 1m door for ARCHIVE.	11.5			
29	Table plates, Acrylic sheet, H: 8 cm, W: 30 cm.		37		
30	4 bathrooms (white) with width of 120cm, length 150cm with bricks and plaster + ceramic including PVC doors standard with 6 sinks, 6 toilets, mirror and 4 exhaust fans, 2 boiler of 50 lit (Artel).		4		
31	One metal door (3x2.5) m for parking and generator area behind the building.				
32	Floor Ceramic tile with installation.	300			
33	Back lit Fascia: Printing and installation of one fascias made of 3M Pan flex. Length (10x1.5) m on top of building.	15	1		
34	Shuttering 27 windows from outside of the branch.	85			
35	Fire Alarm (2) Fire Extinguisher (5) Smoke Detector (10) Emergency light (10)				

Sample picture 1



Sample picture 2

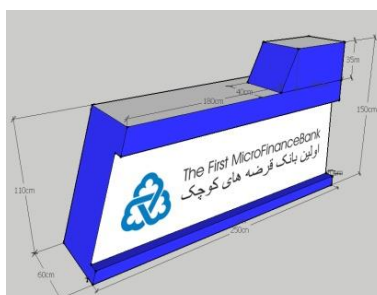

Sample picture 3



Any queries related to this Tender should be submitted to info@fmfb.com.af clearly stating "CONSTRUCTION/SETUP OF SHIBERGHAN BRANCH" in the e-mail subject.

To find out more about The First MicroFinanceBank, visit www.fmfb.com.af